




# Easy-Clean Grout Colorant

- ✓ Restore or change the color of your grout
- ✓ Seals and protects grout
- ✓ For sanded, non-sanded or epoxy grout



- ✓ Resists stains and soil
- ✓ Super-easy to clean
- ✓ No sealers, ever

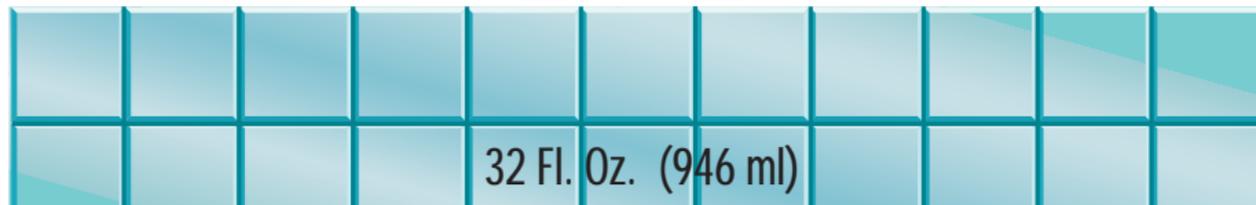

If different lot numbers are being used, mix all containers together to provide a uniform color. To ensure color consistency, order enough (or a little extra) of colorant with the same lot number.

Color Fast Grout Colorant can be used to change the color of sanded and non-sanded grout joints. It also seals and protects grout from moisture and staining.

### WEAR RUBBER GLOVES AND EYE PROTECTION.

**PREPARATION.** Before attempting to color your grout with Color Fast Grout Colorant, test a small area first. Test for previously applied sealers by applying a few drops of water to grout. If water beads, a sealer is present and must be removed before application of colorant.

Allow at least 7 days curing time for new grout. Existing grout must be clean, dry and free of dirt and grease. Clean grout with Color Fast Heavy Duty Citrus Cleaner.

Previously applied sealers must be removed using sealer and adhesive remover. Porous tiles must be sealed to ensure that grout colorant does not penetrate into the tile.

**APPLICATION.** Stir well to mix pigments and solids thoroughly. Do not apply when temperature is below 50°F or above 80°F. Damp sponge grout before application of colorant. Pour a small amount into a dish or container. Using a bristle brush, dip into colorant and apply a thin coat to grout using a back and forth motion. Try to limit the amount of colorant that gets onto the tile. If you are going from a dark to a lighter grout color, 2 or more applications of colorant may be necessary. Allow a minimum of 2 hours drying time between coats. Clean edge of tile as you go or allow colorant to dry at least 5 minutes but not more than 45 minutes (time will vary depending on ambient temperature—test before application). Remove colorant

residue from tile with water and nylon scrub pad. Avoid direct scrubbing on grout joints for at least 20 days to allow colorant to reach maximum durability.

**NOTE.** Color Fast Grout Colorant is not recommended for use under water. Store colorant in original container at temperatures below 110°F (45°C).

**ROUTINE MAINTENANCE.** For routine cleaning of grout, use water based cleaners. Do not use solvents.

**COVERAGE.** Approximately 80 sq. ft. per 8 oz. with 4"x4" tile on 1/4" grout joint.

**CAUTION:** Some colors contain from 0.002% to 0.15% Carbon Black (CAS#1333-86-4) which has been identified by the State of California as a carcinogen. Do not take internally. If ingested do not induce vomiting. If contact with eyes or skin, flush with water. If irritation persists, seek medical attention.

### KEEP OUT OF REACH OF CHILDREN

**NOTICE TO PURCHASER:** Manufacturers liability for damages hereunder shall not exceed the purchase price of the goods used. Manufacturer warrants only that the goods will be free from defects in material. The forgoing warranty is in lieu of all other warranties, express or implied, including those of merchantability of fitness for any purpose not expressly set forth herein. No liability is assumed by manufacturer except as expressly stated herein. In no event shall manufacturer be responsible for incidental or consequential damages arising out of or in connection with the use of this product by user, buyer's user, or any other person.

SOLIDS MAY SETTLE DURING SHIPPING AND STORAGE.

**COLOR FAST INDUSTRIES, INC.**  
COLTON, CA 92324  
[WWW.COLORFASTIND.COM](http://WWW.COLORFASTIND.COM)